

Characterization of Atmospheric Fluidized Bed Combustion (AFBC) Residues and Their Use in Agriculture.

By
Jody K. Solem

Abstract

Increasing use of sulfur scrubbing technology in coal combustion has resulted in large amounts of high calcium, high sulfur solids. Power plants are faced with finding new ways of disposing of large amounts of these residues. Research over the last ten years has explored many applications of these solids in agriculture. The Department of Agriculture has recommended the use of AFBC residues as a liming agent on some croplands, pastures, or reclaimed surface mines.

Current research in the use of AFBC residues has explored its use in controlling soil erosion and weeds. Mineralogical and physical characterization of these residues and their response to water will help scientists understand the diversity of AFBC residues and their reactivity.

Characterization of Atmospheric Fluidized Bed Combustion (AFBC) Residues and Their Use in Agriculture.

By
Jody K. Solem

Atmospheric Fluidized Bed Combustion is the process where a mixture of pulverized coal (or other solid fuels), crushed limestone, sand, and shale are suspended by jets of air. The churning mass of solids and gases act as a pseudo fluid. This type of combustion process is more efficient at producing energy for lower costs and removing sulfur and nitrous oxide from the exhaust gases.

- 150 FBC Plants in the U.S. producing 5 gigawatts electricity.
- Plants vary in size and operating conditions producing distinctly different combustion residues.
- Agricultural applications for these residues provide an alternative to disposal and include:
 - * Source of Ca and S
 - * Increase pH on acid soils and mine spoils
 - Reduce surface erosion
 - Control weeds
- * Recommended use by the U.S. Department of Agriculture.
- Application rates follow liming rates and do not provide substantial utilization considering the amounts of residues produced annually.
- Besides chemical, physical, and mineralogical information on these diverse residues, researchers need more characterization including CEC, particle size distribution, soluble ions, and buffering capacity.

- Atmospheric Fluidized Bed Combustion (AFBC) processes include:

1. bubbling bed AFBC.

ex. TVA's Shawnee 20 MWe pilot plant

burning: high-sulfur Eastern U.S. bituminous coal

residues: baghouse ash, char, spent bed ash

2. circulating bed AFBC.

ex. Colorado-Ute Nucla demonstration plant

burning: low-sulfur bituminous coal

residues: baghouse ash, spent bed ash

- In a circulating AFBC, the spent bed ash contains a greater range of particle sizes because the ash is recycled into the furnace.

TVA 20 MW Pilot Plant

shawnee


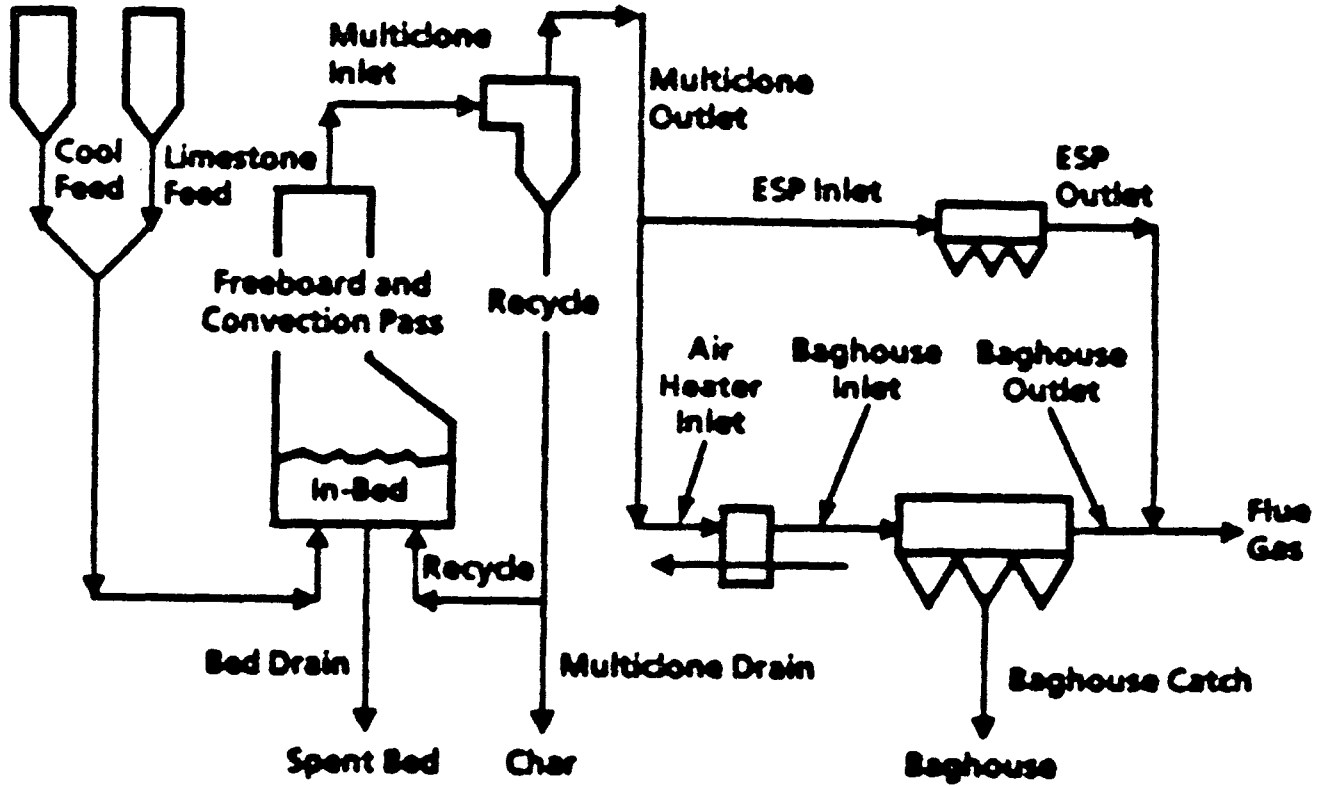


Figure 1. Schematic Diagram of the 20MW AFBC Pilot Plant.

from Cooke, 1988

Circulating AFBC

Colorado Ute

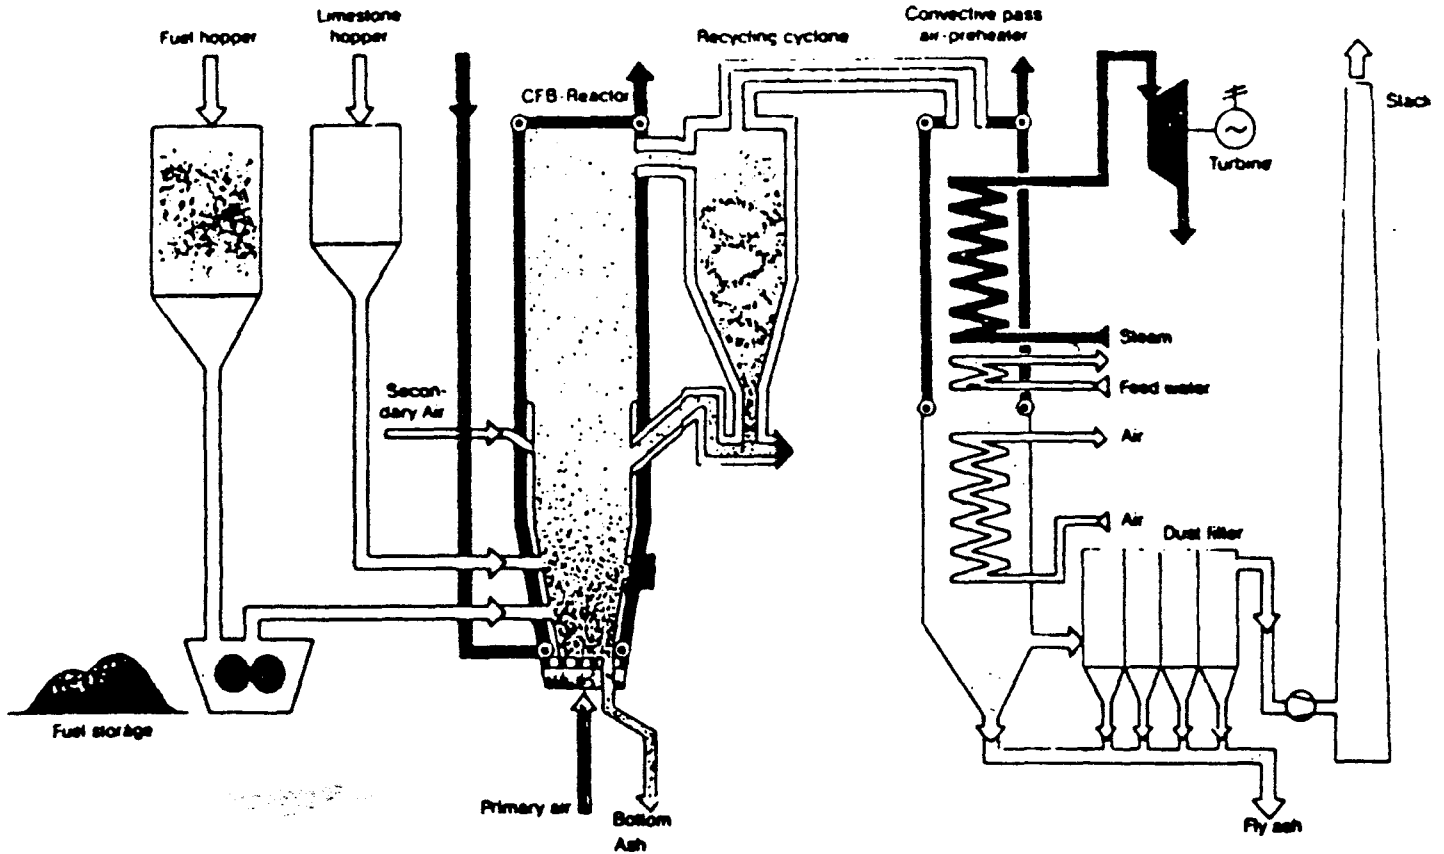

A model of a Fluidized-bed Combustion Power Station

from: Eklund, 1988

Table 2-3
Particle Size Characteristics of FBC Materials

Screen (% ret'd)	MTVA.....		Chatham....	Colorado-Ute....	
		Char	FA	SBM	BH	BA	FA	BA
16#	1180	9.88	..	9.33	..	15.8
30#	600	0.02	..	40.86	..	16.8	..	11.83
50#	300	7.07	..	37.45	..	27.24	..	23.22
100#	150	17.15	..	7.11	1.26	35.17	..	34.37
200#	75	20.75	..	2.85	11.16	10.93	..	14.48
325#	45	13.28	1.50	0.64	16.21	0.27	0.5	..
Pan	<45	41.73	98.50	1.2	71.37	0.25	99.5	..

bubbling bed

circulating bed

Smaller size particles

Table 2-4
Chemical and Partial Phase Compositions (mass %) of FBC Materials

TVA.....		Chatham....	Colorado-Ute....	
	Char	FA	SBM	BH	BA	FA	BA
Chemical Composition:							
SiO ₂	8.75	22.65	7.43	27.98	26.50	47.00	47.90
Al ₂ O ₃	2.72	10.65	2.30	8.56	8.25	23.50	20.00
Fe ₂ O ₃	6.87	11.16	2.08	16.71	5.83	3.20	1.94
CaO	47.55	29.31	52.45	30.71	36.07	10.88	16.29
MgO	0.98	1.20	1.90	1.72	2.55	0.86	1.19
Na ₂ O	0.24	0.29	0.15	0.53	0.75	0.15	0.22
K ₂ O	0.33	1.08	0.41	0.66	1.63	0.91	1.43
TiO ₂	0.13	0.54	0.08	0.47	0.38	0.94	0.51
P ₂ O ₅	0.03	0.17	0.02	0.58	0.36	0.01	0.03
SO ₃	20.10	15.81	30.72	10.59	17.88	4.82	8.99
Carbon	6.67	5.26	0.20	0.60	0.05	6.77	1.20
CO ₂	3.83	3.14	0.22	0.32	0.27	n.a.	n.a.
H ₂ O	1.70	0.12	1.26	0.13	0.64	n.a.	n.a.
Total	99.90	101.38	99.22	99.56	101.16	99.04	99.70
Phase Composition:							
CaO	23.3	13.9	26.7	22.4	21.2	7.5	10.0
Ca(OH) ₂	7.0	0.5	5.2	0.5	2.6
CaSO ₄	34.2	26.9	52.2	18.0	30.4	8.2	15.3
CaCO ₃	8.7	7.1	0.5	0.7	0.6
Carbon	6.7	5.3	0.2	6.8	1.2
Other*	20.1	46.4	15.1	58.3	45.1	77.5	73.5

*Lime
Portlandite
Anhydrite
Calcite*

↑ Si AL

* Assumed to be coal-associated minerals (e.g., silica, calcined clay)

from: Berry 1991


Table 1
 Variations in some chemical constituents of 9 samples of
 atmospheric fluidized bed combustion (AFBC) residue and soils

Group	Component	AFBC residue ¹		Soils ²	
		Average	Range	Average	Usual range
----- Percent of CaCO ₃ -----					
Lime	CaO and MgO	60	31-100		
<u>Micrograms per grams of dry material</u>					
Essential plant nutrients	Ca	380,000	240,000-460,000		
	S	92,000	72,000-140,000	850	100-1,500
	Mg	7,100	5,000-12,000		
	K	2,500	500-8,000		
	P	430	380-500		400-3,000
	Fe	11,000	800-16,000	---	14,000-40,000
	Mn	485	210-685	850	200-3,000
	Mo	.19	.12-.28	2	.2-5
	B	110	95-170	10	2-100
	Cu	15	12-19	20	2-100
	Zn	55	29-105	50	10-300
Heavy metals	Ni	21	13-29	40	5-500
	Pb	3.2	1.5-7.5	10	2-200
	Cd	.5	---	.5	.01-.70
	Cr	15	9-23	200	5-1,000
Phytotoxic elements	Se	.29	.16-.58	---	.1-2
	Al	10,000	4,000-20,000	---	14,000-40,000

¹From Stout, W.L., and others (25).

²From Baker, D.E., and L. Chesnin (2).

from: Stout, 1988

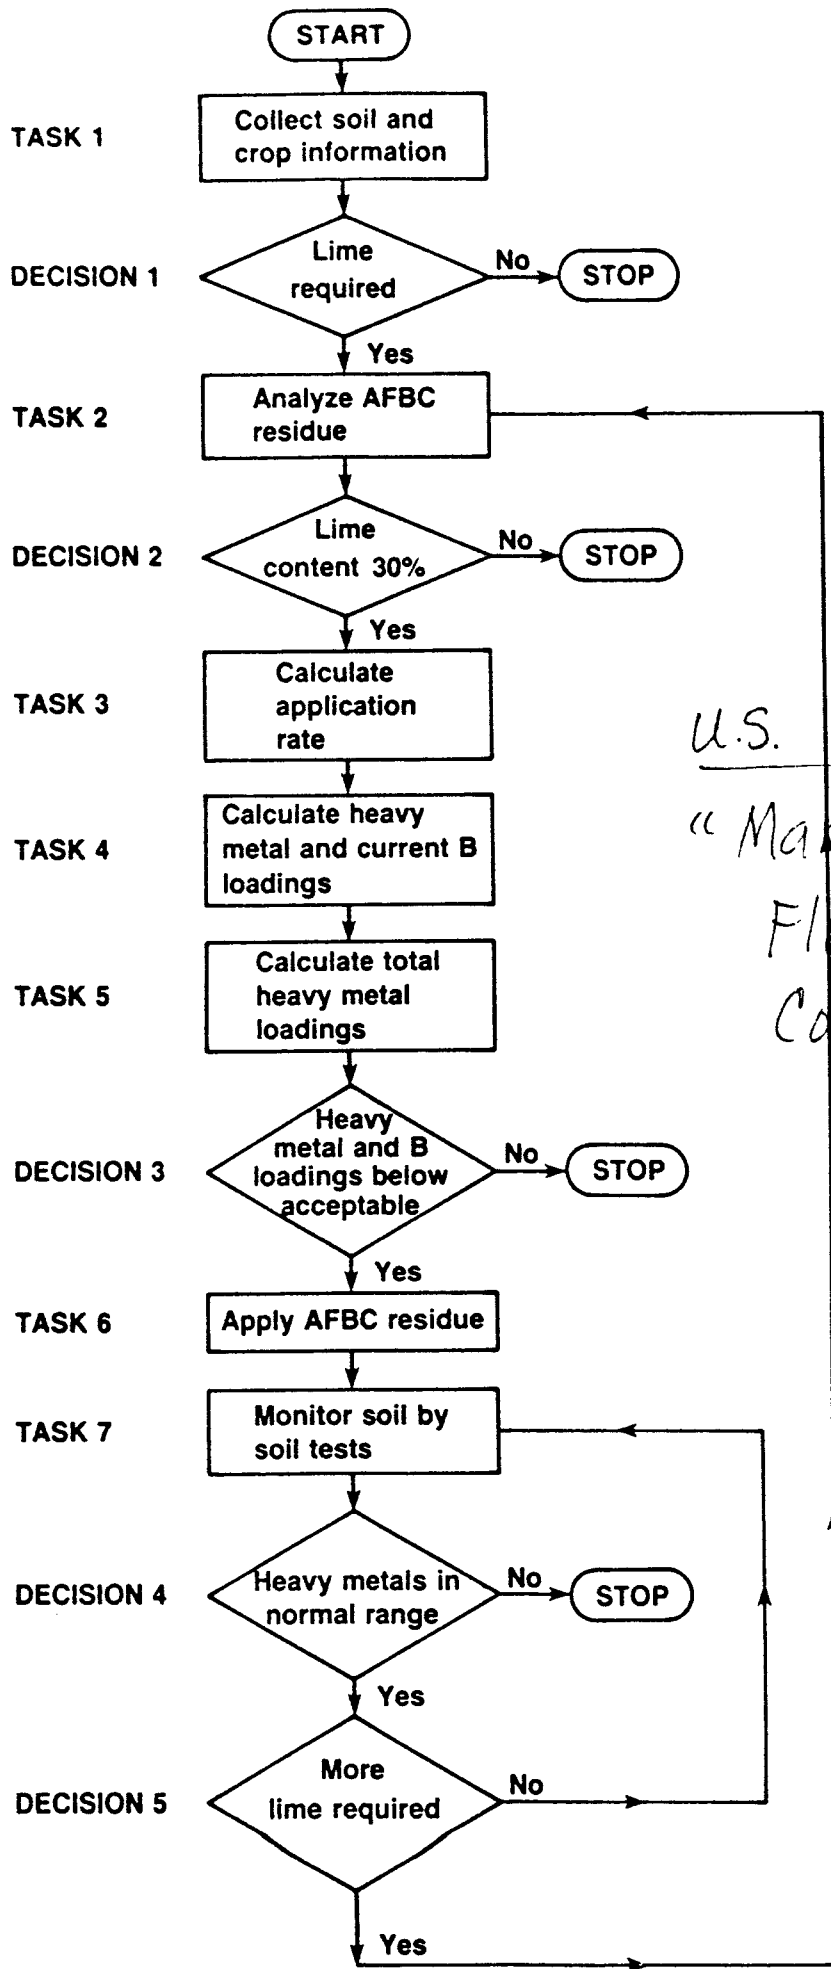

U.S. Dept. Agriculture:
 "Manual for Applying
 Fluidized Bed
 Combustion Residue
 to Agricultural
 Lands."

from: Stout, 1988

Generalized Results of Agricultural Applications:

Liming of Mine Spoils and Acid Soils:

- No movement of heavy metals (B, Cd, Cr, Cu, Ni, Pb, Zn, Sr) through the mine spoil profile.
- Only Mn levels increased somewhat in the percolate from FBC treated columns.
- In the acid soil matrix Ca was the only element to move below 10 cm.
- Both Ca and SO₄ concentrations increased in the percolate.
- Ca, SO₄, and Mn concentrations were within safe drinking levels.
- No environmental problems were apparent from liming rate application of FBC residues on marginal soils and mine spoils.

Reduced Surface Sealing

- reduced surface sealing and soil erosion on slopes of 5% but not on slopes of 30%.
- Due to the flocculation of the clays.
- FBC residues was more effective at reducing surface sealing than phosphogypsum or flue gas desulfurization (FGD) residues. This was due to greater solubility of the minerals in the FBC.


Source of Ca and S

- FBC residues (1X to 3X lime requirement) maintained soil pH.
- Increased extractable Ca (and Mg in Dolomitic scrubber).
- In some cases increased leaf concentrations of Ca (conflicting results).
- In most cases there was no accumulation of heavy metals in the plant tissue.
- Reduced Pecan leaf N, Mn, Zn, and Al after 3 applications. Not recommended to use over long periods of time.
- Other than pecans there was no observed nutritional deficiencies.


Disposal levels in control of weeds

- Lime substitute application is 2-6 mg/ha. Disposal rate applied was 9.2 Kg/m² and 36 Kg/m² (50 tons/acre).
- Apple yields increased for most cultivars.
- Leaf tissue Ca concentrations increased dramatically (dependent on rootstocks).
- Peel and Flesh Ca concentrations remained about the same.
- Mg concentrations in plant tissue did not decrease, and was higher at low application rate.




Materials from Pope, Evans, & Young Pilot Steam
generator
Eastern bituminous coal
'limestone bed'

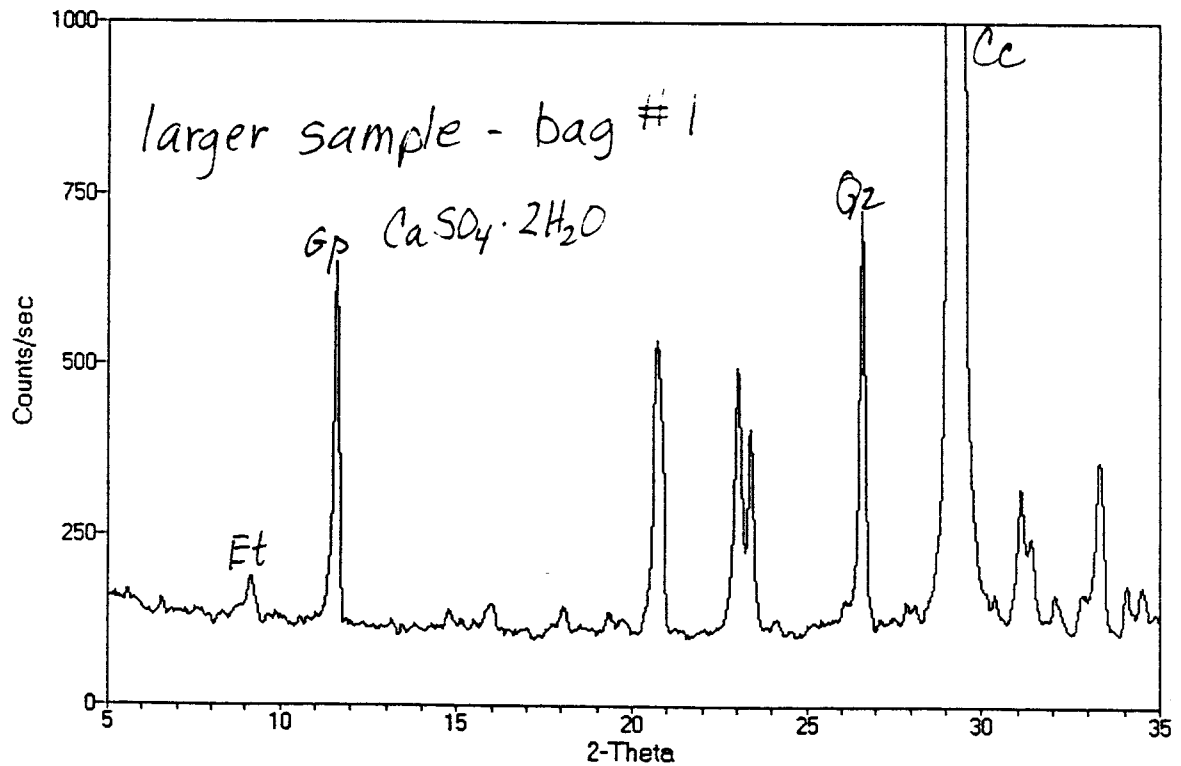



50 tons/acre surface applied 1980, plowed under
1986, sampled 1992.

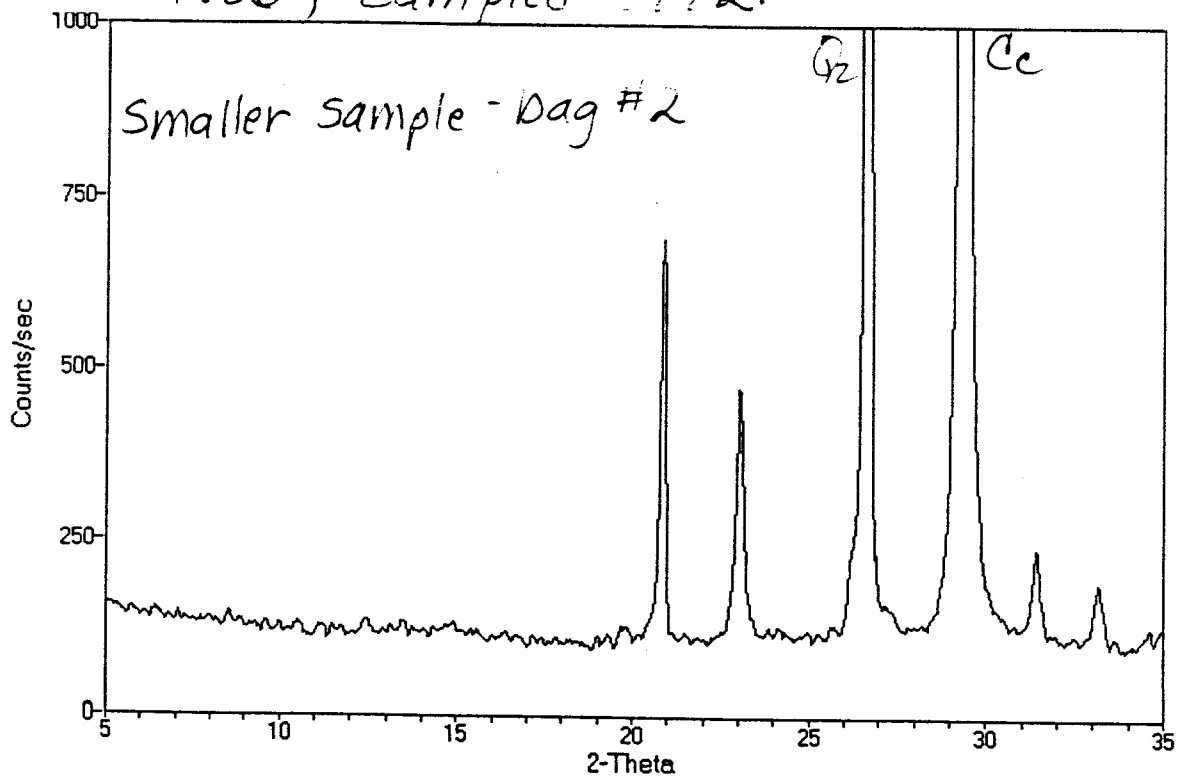



TVA: bubbling bed AFBC

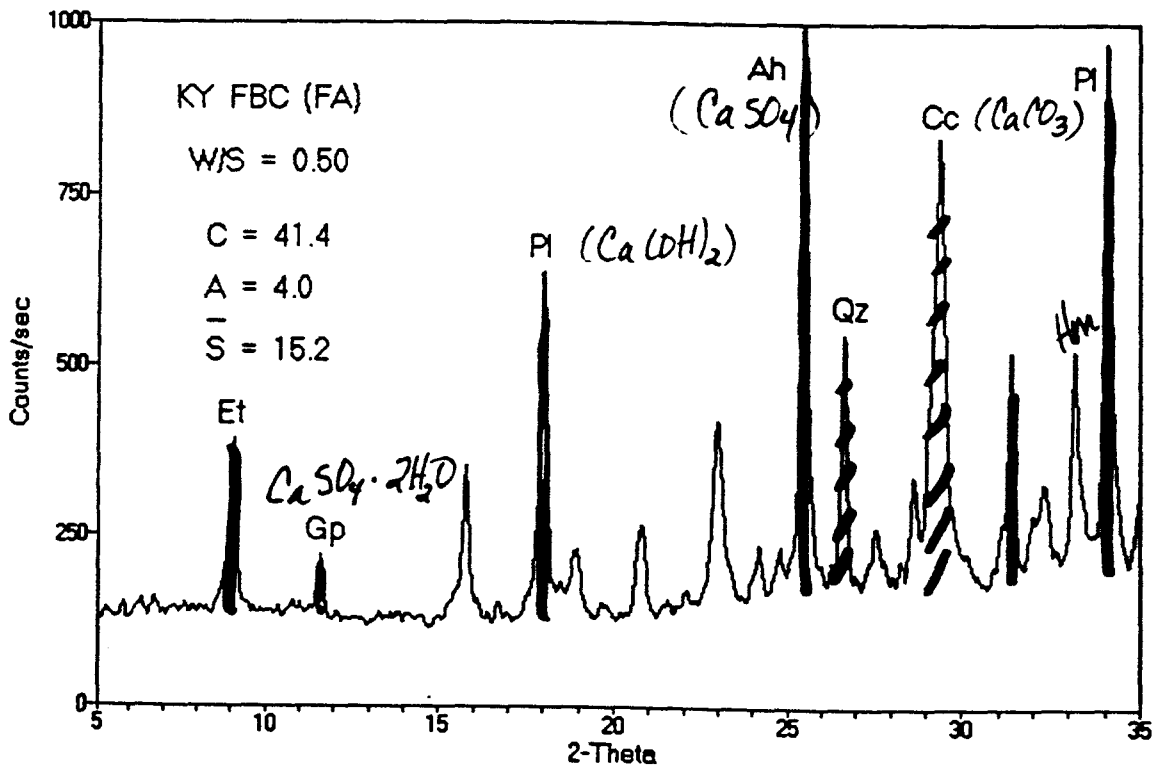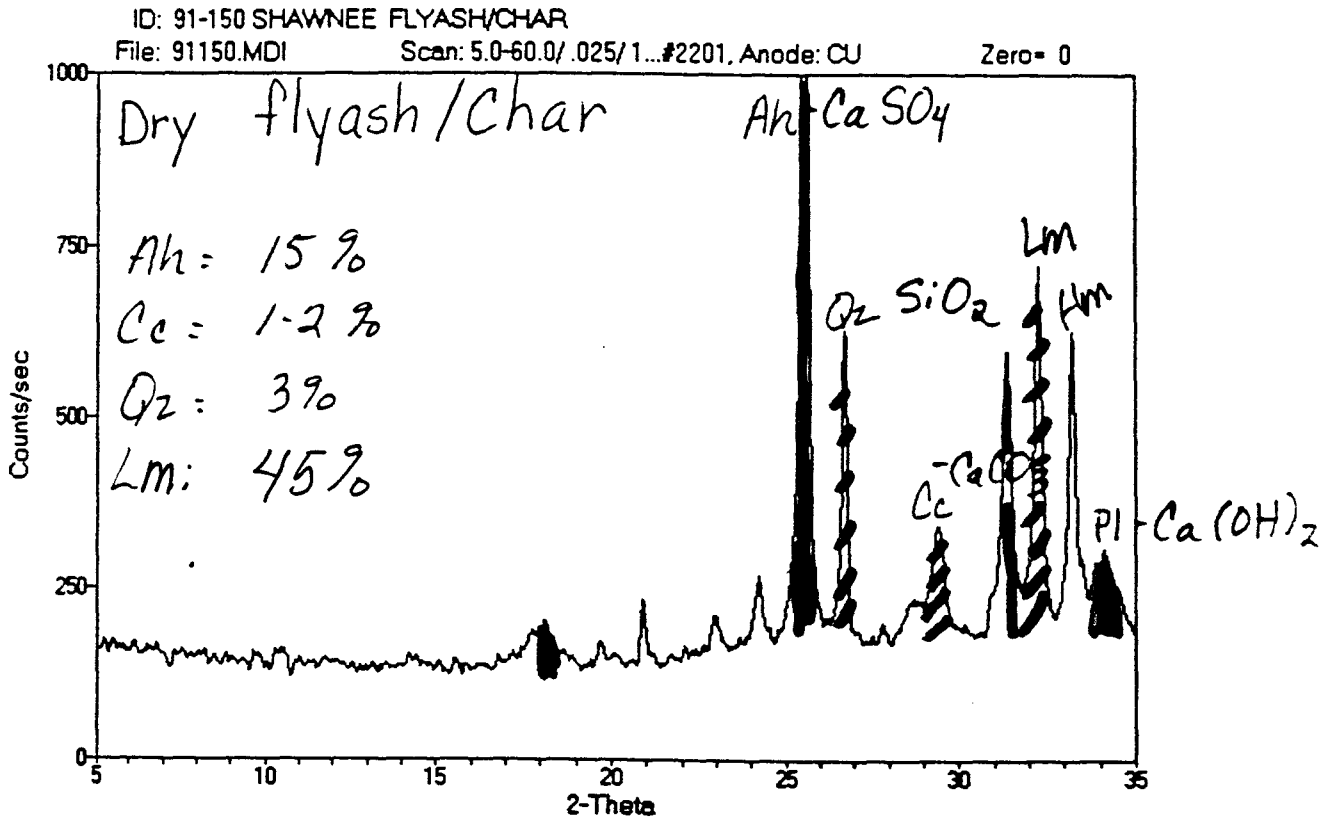


TVA : bubbling bed AFBC

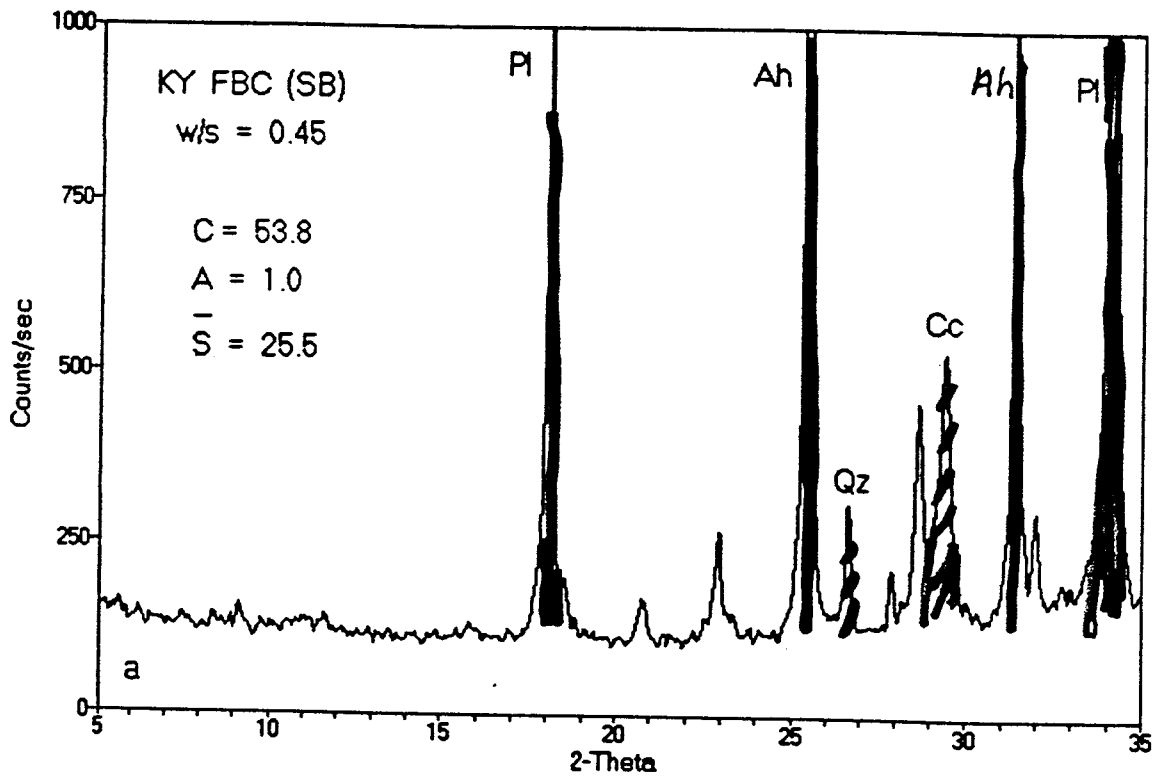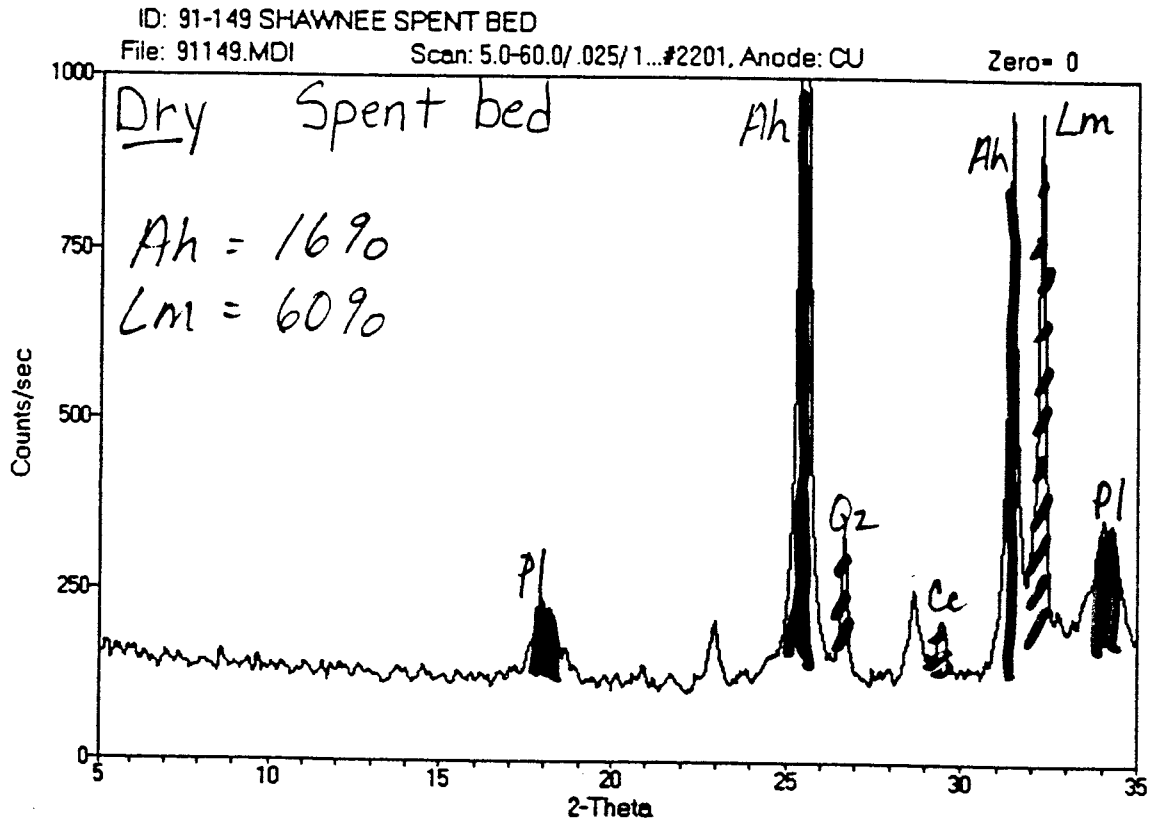


Colorado Ute: circulating bed AFBC

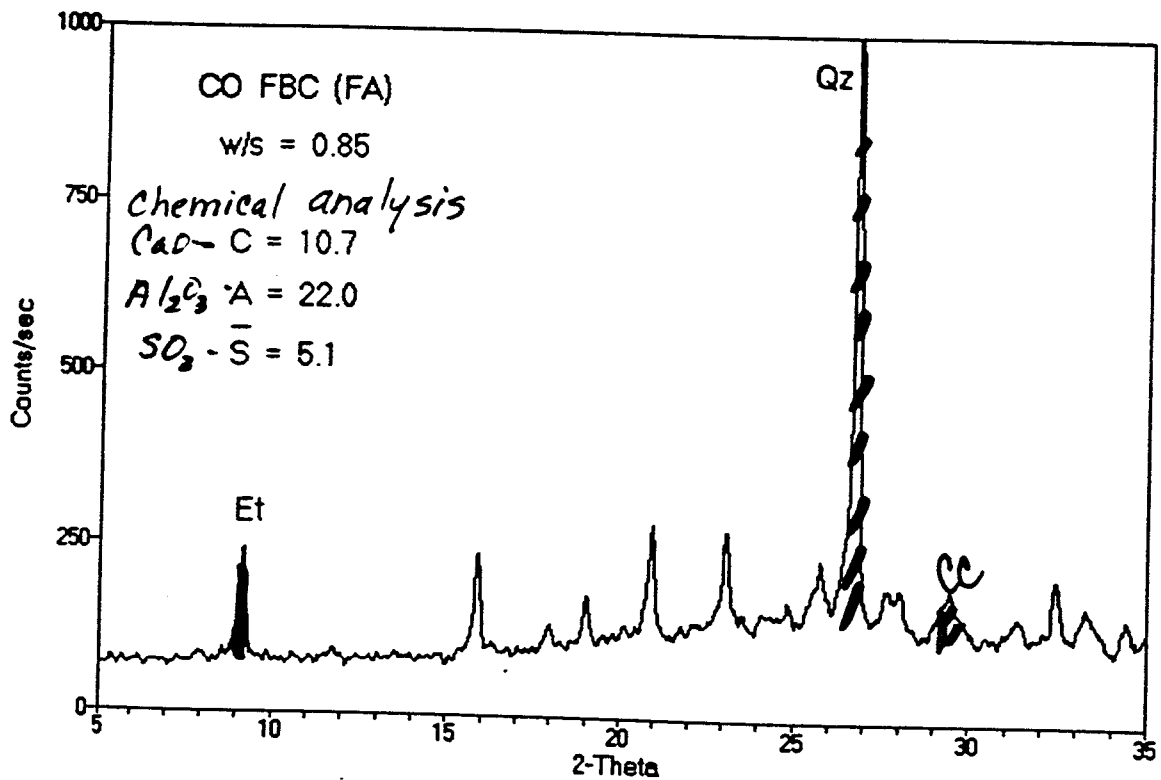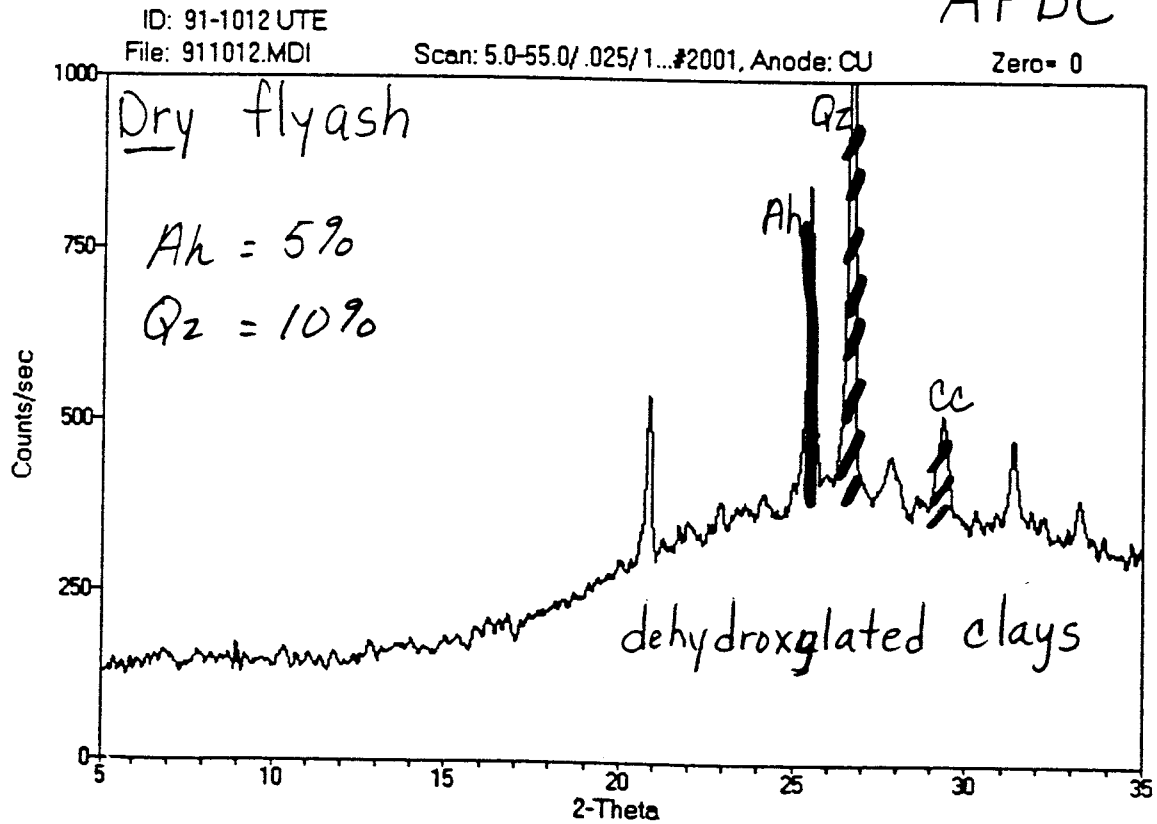

Georgetown University bubbling bed AFBC

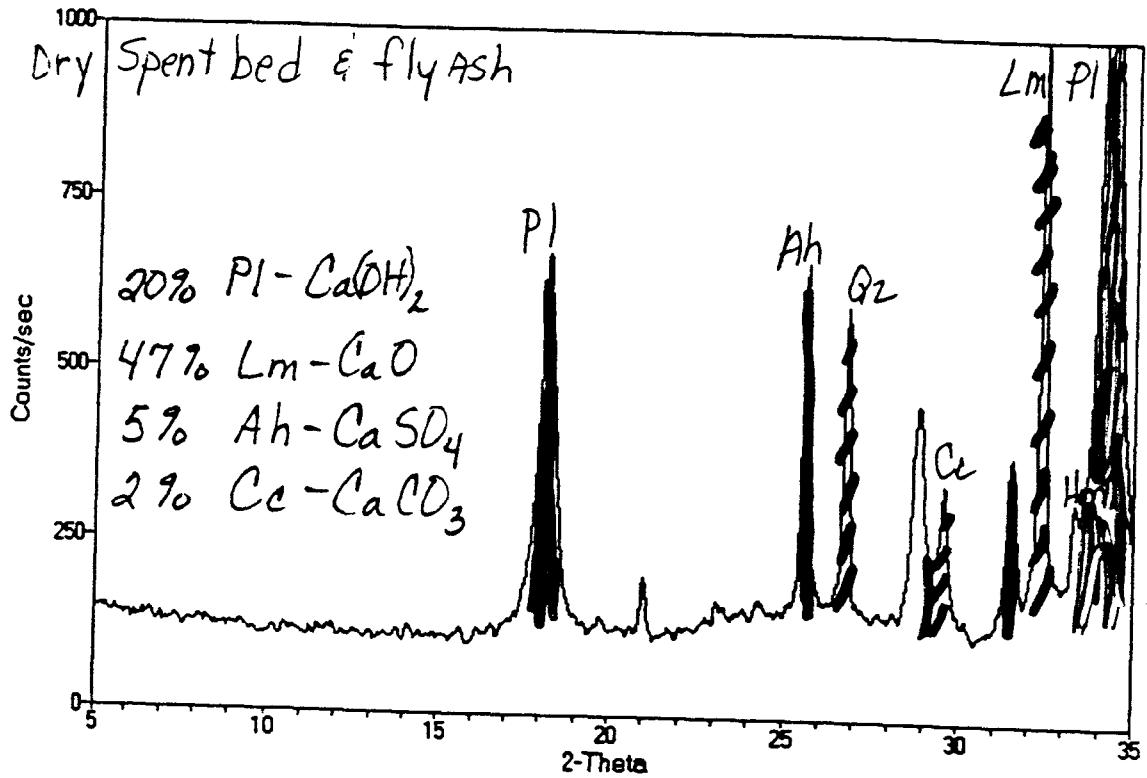

Yorktown, PA Papermill circulating AFBC

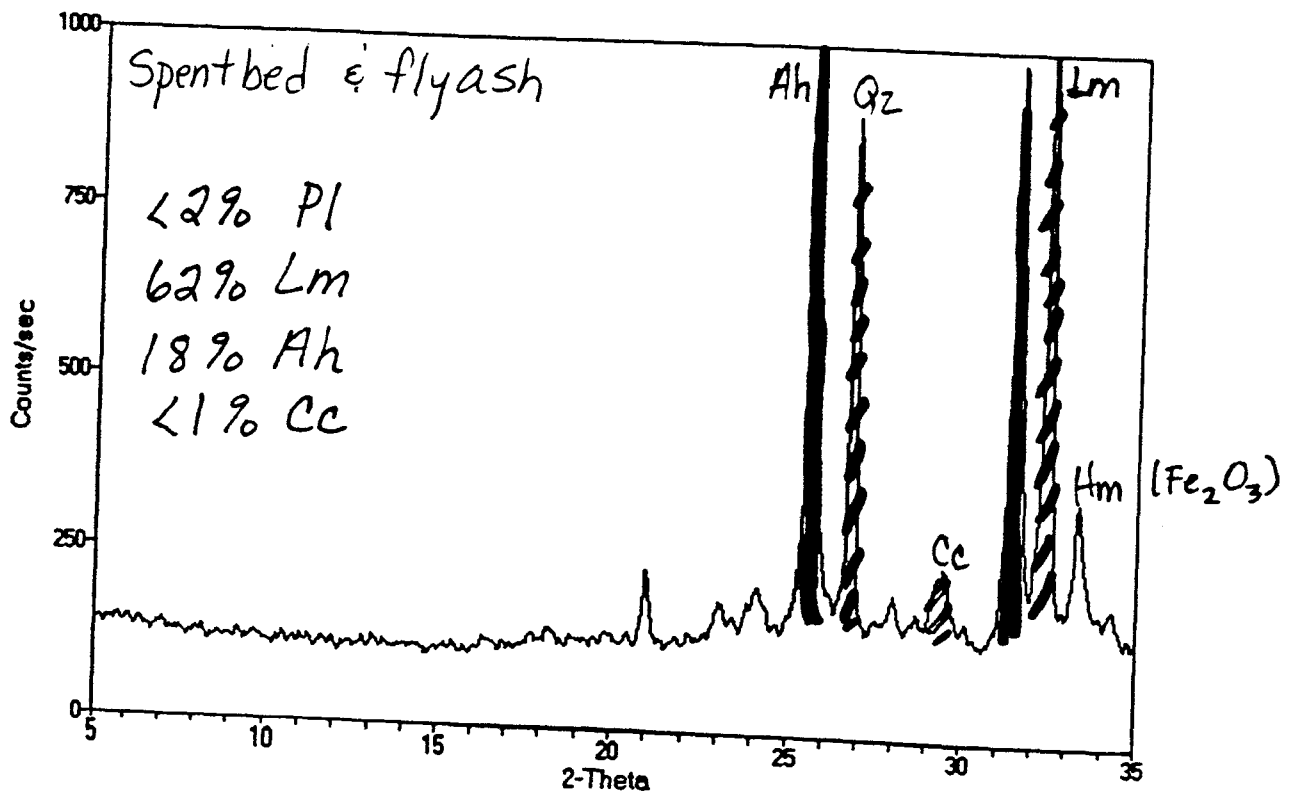

Conclusions and Discussion

The U.S. Department of Agriculture has recommended AFBC residues for use as a liming agent on certain soils with proper guidelines. The major concern at this time is heavy metal loading on the soils. This is more of a problem for municipal sewage sludge and the flash from older coal combustion technologies, which are higher in heavy metal concentrations.

Disposal level applications of AFBC residues could dramatically alter the texture of soils and possibly the CEC.

Mixed research results in plant and soil elemental concentrations is probably due to variations in physical, chemical and mineralogical characteristics of FBC residues.

More work needs to be done characterizing the physical, chemical, and mineralogical properties of AFBC residues to better understand their diversity.

Additional characterization of such properties as CEC, particle size distribution, soluble ions, and buffering capacity of these residues would be highly recommended to better assess the impact of these residues on agricultural lands.

Bibliography

- Berry, E.E., R.T. Hemmings, and B.J. Cornelius. 1991. Commercialization Potential of AFBC Concrete: Part 2 Volume 2: Mechanistic Basis for Cementing Action. Electric Power Research Institute, report # GS-7122, Vol.2.
- Cook W.M., M.S. Ross, R.A. Siery, J.E. Gebhare, M.L. Zimmerman, Jerry Harness and David Wetmore. 1988. "Evaluation of emissions from the TVA 20 MW AFBC pilot plant" in Proceedings: 1988 Seminar on Fluidized-Bed Combustion Technology for Utility Applications. Electric Power Research Institute. report # GS-1179.
- Edwards, J.H., B.D. Horton, A.W. White, Jr., and O.L. Bennett. 1985. Fluidized bed combustion residue as an alternative liming material and Ca source.
- Edwards, J.H., A.W. White, Jr., and O.L. Bennett. 1985. Effects of fluidized bed combustion residue on pecan seedling growth and nutrient content. Comm. In Soil Sci. Plant Anal., 16(6), 639-652.
- Eklund, A.G., D.A. Orr, and M.L. Owen. 1988. "Effects of process variables on atmospheric fluidized bed combustion solid waste characteristics" in Proceedings: 1988 Seminar on Fluidized-Bed Combustion Technology for Utility Applications. Electric Power Research Institute. report # GS-1179.
- Korcak, R.F., J.J. Wrubel, Jr., and N.F. Childers. 1984. Peach orchards studies utilizing fluidized bed material. J. Plant Nut., 7(11), 1597-1604.
- Korcak R.F. 1980. Fluidized bed material as a lime substitute and calcium source for apple seedlings. J. Environ. Qual., Vol. 9, no. 1.
- Norton, L.D., I. Shainberg, and K.W. King. (to be published). Utilization of gypsiferous amendments to reduce surface sealing in some humid soils of the eastern USA.
- Sidle R.C., W.L. Stout, J.L. Hern, and O.L. Bennett. 1979. Solute movement from fluidized bed combustion waste in acid soil and mine spoil columns. J. Environ. Qual, Vol. 8., no. 2.
- Solem, J.K. and G.J. McCarthy. 1992. Hydration reactions and ettringite formation in selected cementitious coal conversion by-products. Materials Research Society Symposium Proceedings Series, Vol. 245.
- Stout W.L., R.C. Sidle, J.L. Hern, and O.L. Bennett. 1979. Effects of fluidized bed combustion waste on the Ca, Mg, S, and Zn levels in Red clover, tall fescue, oat, and buckwheat. Agronomy journal, Vol. 71, July-Aug.
- Stout, W.L., J.L. Hern, R.F. Korcak, and C.W. Carlson. 1988. Manual for Applying Fluidized Bed Combustion Residue to Agricultural Lands. U.S. Department of Agriculture, Agricultural Research Service, ARS-74, 15pp.
- Terman, G.L., V.J. Kilmer, C.M. Hunt, and W. Buchanan. 1978. Fluidized bed boiler waste as a source of nutrients and lime. J. Environ. Qual., Vol.7, no.1.
- Wrubel, J.J., Jr., R.F. Korcak, Norman Childers. 1982. Orchard studies utilizing fluidized bed material. Commun. in Soil Sci. Plant Anal. 13(12), 1071-1080.